





陕西声科电子科技有限公司
SHAANXI SHENGKE ELECTRONIC TECHNOLOGY CO.,LTD

TEL: 029-88858601
E-mail:sales02@skgauge.com

FAX: 029-88858601
http://www.skgauge.com

RadarMe

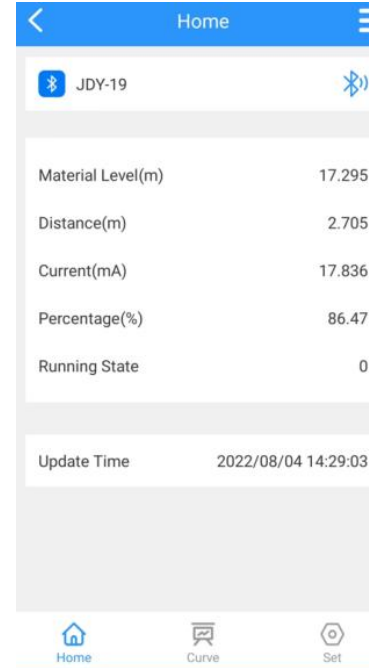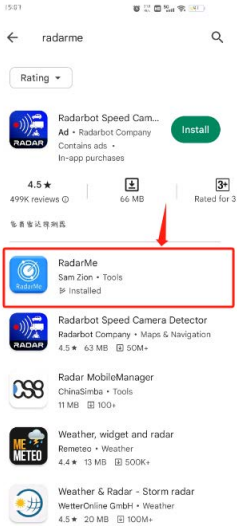

Specification

| | |
|----------------------------|---|
| Model | SK-R800W |
| Product Type | FMCW Radar Level Transmitter |
| Application | *Open channel water measurement *Standard liquid measurement |
| Frequency | 77GHz-81GHz |
| Measurement Range | Liquid: 10M 20M 30M |
| Accuracy | ±2mm for liquid |
| Beam Angle | ±3.5° |
| Material | PP (polypropylene) |
| Process Connection | Thread and flange (customized) |
| Process Temperature | -20°C to 70°C |
| Process Pressure | Normal atmospheric pressure |
| Signal output | 4-20mA / RS485/ Bluetooth |
| Power | Two-wire DC 24V (22V~30V)/Four-wire DC (8-36V) |
| Protection | IP67 |



陕西声科电子科技有限公司
SHAANXI SHENGKE ELECTRONIC TECHNOLOGY CO.,LTD

TEL: 029-88858601
E-mail:sales02@skgauge.com

FAX: 029-88858601
<http://www.skgauge.com>

SK-R800 Model Selection

SK-R800W 80GHz Radar Level Transmitter (PP housing, no display)

| Code | Medium Type |
|--------|-----------------------|
| 2/4 | Two-wire/Four-wire |
| Code | Measuring Range(m) |
| 0.2~30 | 10、20、30 |
| Code | Connection |
| G | G'Thread |
| F | Flange |
| Code | Temperature |
| N | -20-70°C |
| Code | Cable entry |
| M | M16×1.5(F) |
| Code | Electronics |
| T | Two-wire 4...20mA |
| M | Modbus |
| B | Bluetooth wireless |

SK-R800